


Conduit Bodies

Combination (EMT/IMC/RIGID)

LB Type

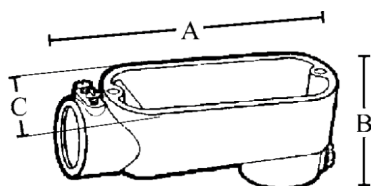

Features

- Set screw and threaded LB type
- Suitable for use in concrete
- NPT Tapered hubs
- NEMA FB1 rated for wet locations use with threaded rigid metal conduit only

Applications

- Provides access to conductors for pulling, splicing and maintenance

Standard Material

- Copper free aluminum die cast
- Steel screws


Standard Finish

- Powdercoat

Catalog Number	Size	Wire Size		Unit Carton	Ship Case	Weight /Case lbs	Dimensions (in)		
		Max. Number	Max. Size				A	B	C
E-LB-50	1/2"	1	6 AWG	10	100	28	4.295	2.150	1.330
E-LB-75	3/4"	2	6 AWG	10	50	19	5.090	2.430	1.540
E-LB-100	1"	3	6 AWG	5	25	20	5.915	2.765	1.740
E-LB-125	1-1/4"	3	2 AWG	2	10	13	7.894	3.665	2.490
E-LB-150	1-1/2"	3	2 AWG	2	10	14	7.894	3.665	2.490
E-LB-200	2"	3	2/0 AWG	1	5	13	10.134	4.275	3.100
E-LB-250	2-1/2"	3	2/0 AWG	—	1	6	12.500	5.437	4.450
E-LB-300	3"	3	4/0 AWG	—	1	6	12.500	5.657	4.450
E-LB-350	3-1/2"	3	500 MCM	—	1	8	15.500	6.922	5.500
E-LB-400	4"	3	500 MCM	—	1	8	15.500	6.922	5.500

Combination (EMT/IMC/RIGID)

C Type



Features

- Setscrew and threaded C type
- Suitable for use in concrete
- NPT Tapered hubs
- NEMA FB1 rated for wet locations use with threaded rigid metal conduit only

Applications

- Provides access to conductors for pulling, splicing and maintenance

Standard Material

- Copper free aluminum die cast
- Steel screws


Standard Finish

- Powdercoat

Catalog Number	Size	Wire Size		Unit Carton	Ship Case	Weight / Case lbs	Dimensions (in)		
		Max. Number	Max. Size				A	B	C
E-C-50	1/2"	1	6 AWG	10	100	30	5.350	1.310	1.310
E-C-75	3/4"	2	6 AWG	10	50	21	5.570	1.625	1.540
E-C-100	1"	3	6 AWG	5	25	25	6.460	1.900	1.740
E-C-125	1-1/4"	3	2 AWG	2	10	15	8.528	2.770	2.490
E-C-150	1-1/2"	3	2 AWG	2	10	17	8.528	2.770	2.490
E-C-200	2"	3	2/0 AWG	1	5	13	10.831	3.335	3.100
E-C-250	2-1/2"	3	4/0 AWG	—	1	6	13.00	4.063	5.709
E-C-300	3"	3	250 MCM	—	1	7	12.50	4.682	5.506
E-C-350	3-1/2"	3	350 MCM	—	1	8	15.50	5.452	6.171
E-C-400	4"	4	350 MCM	—	1	8	15.50	5.452	6.171

CONDUIT BODIES

Combination (EMT/IMC/RIGID) LL Type



Features

- Set screw and threaded LL type
- Suitable for use in concrete
- NPT Tapered hubs
- NEMA FB1 rated for wet locations use with threaded rigid metal conduit only

Applications

- Provides access to conductors for pulling, splicing and maintenance

Standard Material

- Copper free aluminum die cast
- Steel screws

Standard Finish


- Powdercoat



E528771

Catalog Number	Size	Wire Size		Unit Carton	Ship Case	Weight / Case / lbs	Dimensions (in)		
		Max. Number	Max. Size				A	B	C
E-LL-50	1/2"	1	6 AWG	10	100	36	4.560	1.310	2.060
E-LL-75	3/4"	2	6 AWG	10	50	23	5.090	1.625	2.330
E-LL-100	1"	3	6 AWG	5	25	18	5.915	1.900	2.650
E-LL-125	1-1/4"	3	2 AWG	2	10	14	7.894	2.770	3.385
E-LL-150	1-1/2"	3	2 AWG	2	10	16	7.894	2.770	3.385
E-LL-200	2"	3	2/0 AWG	1	5	14	10.134	3.335	3.810
E-LL-250	2-1/2"	3	4/0 AWG	—	1	6	12.500	5.437	4.450
E-LL-300	3"	3	250 MCM	—	1	6	12.500	5.657	4.450
E-LL-350	3-1/2"	3	350 MCM	—	1	8	15.500	6.922	5.500
E-LL-400	4"	4	350 MCM	—	1	8	15.500	6.922	5.500

Combination (EMT/IMC/RIGID) LR Type



Features

- Set screw and threaded LR type
- Suitable for use in concrete
- NPT Tapered hubs
- NEMA FB1 rated for wet locations use with threaded rigid metal conduit only

Applications

- Provides access to conductors for pulling, splicing and maintenance

Standard Material

- Copper free aluminum die cast
- Steel screws

Standard Finish

- Powdercoat




E528771

Catalog Number	Size	Wire Size		Unit Carton	Ship Case	Weight / Case lbs	Dimensions (in)		
		Max. Number	Max. Size				A	B	C
E-LR-50	1/2"	1	6 AWG	10	100	29	4.560	1.310	2.060
E-LR-75	3/4"	2	6 AWG	10	50	24	5.090	1.625	2.330
E-LR-100	1"	3	6 AWG	5	25	16	5.915	1.900	2.650
E-LR-125	1-1/4"	3	2 AWG	2	10	14	7.894	2.770	3.385
E-LR-150	1-1/2"	3	2 AWG	2	10	17	7.894	2.770	3.385
E-LR-200	2"	3	2/0 AWG	1	5	14	10.134	3.335	3.810
E-LR-250	2-1/2"	3	4/0 AWG	—	1	6	12.500	5.437	4.450
E-LR-300	3"	3	250 MCM	—	1	6	12.500	5.657	4.450
E-LR-350	3-1/2"	3	350 MCM	—	1	8	15.500	6.922	5.500
E-LR-400	4"	4	350 MCM	—	1	8	15.500	6.922	5.500

CONDUIT BODIES

Combination (EMT/IMC/RIGID) T Type



Features

- Set screw and threaded T type
- Suitable for use in concrete
- NPT Tapered hubs
- NEMAFB1 rated for wet locations use with threaded rigid metal conduit only

Applications

- Provides access to conductors for pulling, splicing and maintenance

Standard Material

- Copper free aluminum die cast
- Steel screws

Standard Finish

- Powdercoat




E528771

Catalog Number	Size	Wire Size			Ship Case	Weight / Case lbs	Dimensions (in)		
		Max. Number	Max. Size	Unit Carton			A	B	C
E-T-50	1/2"	1	6 AWG	10	100	29	5.350	1.310	2.060
E-T-75	3/4"	2	6 AWG	10	50	30	5.570	1.625	2.335
E-T-100	1"	3	6 AWG	5	25	15	6.460	1.900	2.705
E-T-125	1-1/4"	3	2 AWG	2	10	17	8.528	2.770	3.630
E-T-150	1-1/2"	3	2 AWG	2	10	19	8.528	2.770	3.630
E-T-200	2"	3	2/0 AWG	—	2	5	10.831	3.335	3.980
E-T-250	2-1/2"	3	4/0 AWG	—	1	7	13.500	4.060	5.825
E-T-300	3"	3	250 MCM	—	1	7	13.500	4.685	5.825
E-T-350	3-1/2"	3	350 MCM	—	1	9	15.937	5.450	7.060
E-T-400	4"	4	350 MCM	—	1	9	15.937	5.450	7.060

Conduit Bodies with Cover and Gasket

Combination (EMT/IMC/RIGID)

LB Type



E528771

Features

- Set screw and threaded LB type with cover and gasket
- Suitable for use in concrete
- NPT Tapered hubs
- NEMA FB1 rated for wet locations use with threaded rigid metal conduit only

Applications

- Provides access to conductors for pulling, splicing and maintenance

Standard Material

- Copper free aluminum die cast

- Steel screws


Standard Finish

- Powder coat

Catalog Number	Size	Wire Size			Ship Case	Weight / Case lbs	Dimensions (in)		
		Max. Number	Max. Size	Unit Carton			A	B	C
E-LB-50-CG	1/2"	2	6 AWG	10	100	29	4.560	2.060	1.310
E-LB-75-CG	3/4"	2	6 AWG	10	50	23	5.090	2.430	1.540
E-LB-100-CG	1"	3	6 AWG	5	25	19	5.915	2.765	1.740
E-LB-125-CG	1-1/4"	3	2 AWG	2	10	14	7.894	3.665	2.490
E-LB-150-CG	1-1/2"	3	2 AWG	2	10	15	7.894	3.665	2.490
E-LB-200-CG	2"	3	2/0 AWG	1	5	14	10.134	4.275	3.100
E-LB-250-CG	2-1/2"	3	2/0 AWG	—	1	7	12.500	5.437	4.450
E-LB-300-CG	3"	3	4/0 AWG	—	1	7	12.500	5.657	4.450
E-LB-350-CG	3-1/2"	3	500 MCM	—	1	10	15.500	6.922	5.500
E-LB-400-CG	4"	3	500 MCM	—	1	10	15.500	6.922	5.500

Combination (EMT/IMC/RIGID)

C Type



E528771

Features

- Set screw and threaded C type with cover and gasket
- Suitable for use in concrete
- NPT Tapered hubs
- NEMA FB1 rated for wet locations use with threaded rigid metal conduit only

Applications

- Provides access to conductors for pulling, splicing and maintenance

Standard Material

- Copper free aluminum die cast

- Steel screws

Standard Finish


- Powder coat

Catalog Number	Size	Wire Size			Ship Case	Weight Case lbs	Dimensions (in)		
		Max. Number	Max. Size	Unit Carton			A	B	C
E-C-50-CG	1/2"	2	6 AWG	5	100	30	4.720	1.370	1.330
E-C-75-CG	3/4"	2	6 AWG	5	50	21	5.570	1.625	1.540
E-C-100-CG	1"	3	6 AWG	5	25	25	6.460	1.900	1.740
E-C-125-CG	1-1/4"	3	2 AWG	5	25	15	8.528	2.770	2.490
E-C-150-CG	1-1/2"	3	2 AWG	5	10	17	8.528	2.770	2.490
E-C-200-CG	2"	3	2/0 AWG	1	5	13	10.831	3.335	3.100
E-C-250-CG	2-1/2"	3	4/0 AWG	—	1	6	13.00	4.063	5.709
E-C-300-CG	3"	3	250 MCM	—	1	6	12.50	4.682	5.506
E-C-350-CG	3-1/2"	3	350 MCM	—	1	8	15.50	5.452	6.171
E-C-400-CG	4"	4	350 MCM	—	1	8	15.50	5.452	6.171

Conduit Bodies with Cover & Gasket

Combination (EMT/IMC/RIGID)

LL Type



E528771

Features

- Set screw and threaded LL type with cover and gasket
- Suitable for use in concrete
- NPT Tapered hubs
- NEMA FB1 rated for wet locations use with threaded rigid metal conduit only

Applications

- Provides access to conductors for pulling, splicing and maintenance


Standard Material

- Copper free aluminum die cast
- Steel screws Standard Finish
- Powder coat

Catalog Number	Size	Wire Size		Unit Carton	Ship Case	Weight Case lbs	Dimensions (in)		
		Max. Number	Max. Size				A	B	C
E-LL-50-CG	½"	2	6 AWG	10	100	36	4.295	1.310	2.060
E-LL-75-CG	¾"	2	6 AWG	10	50	23	5.090	1.625	2.330
E-LL-100-CG	1"	3	6 AWG	5	25	18	5.915	1.900	2.650
E-LL-125-CG	1-¼"	3	2 AWG	2	10	14	7.894	2.770	3.385
E-LL-150-CG	1-½"	3	2 AWG	2	10	16	7.894	2.770	3.385
E-LL-200-CG	2"	3	2/0 AWG	1	5	14	10.134	3.335	3.810
E-LL-250-CG	2-½"	3	4/0 AWG	---	1	6	12.500	5.437	4.450
E-LL-300-CG	3"	3	250 MCM	---	1	6	12.500	5.657	4.450
E-LL-350-CG	3-½"	3	350 MCM	---	1	8	15.500	6.922	5.500
E-LL-400-CG	4"	4	350 MCM	---	1	8	15.500	6.922	5.500

Combination (EMT/IMC/RIGID)

LR Type

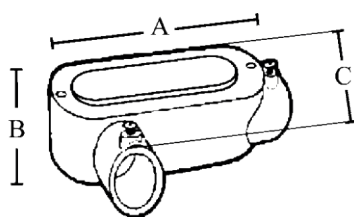

E528771

Features

- Set screw and threaded LR type with cover and gasket
- Suitable for use in concrete
- NPT Tapered hubs
- NEMA FB1 rated for wet locations use with threaded rigid metal conduit only

Applications

- Provides access to conductors for pulling, splicing and maintenance

Standard Material

- Copper free aluminum die cast
- Steel screws

Standard Finish


- Powder coat

Catalog Number	Size	Wire Size		Unit Carton	Ship Case	Weight /Case lbs	Dimensions (in)		
		Max. Number	Max. Size				A	B	C
E-LR-50-CG	½"	2	6 AWG	10	100	36	4.295	1.310	2.060
E-LR-75-CG	¾"	2	6 AWG	10	50	28	5.090	1.625	2.330
E-LR-100-CG	1"	3	6 AWG	5	25	17	5.915	1.900	2.650
E-LR-125-CG	1-¼"	3	2 AWG	2	10	15	7.894	2.770	3.385
E-LR-150-CG	1-½"	3	2 AWG	2	10	18	7.894	2.770	3.385
E-LR-200-CG	2"	3	2/0 AWG	1	5	14	10.134	3.335	3.810
E-LR-250-CG	2-½"	3	4/0 AWG	—	1	7	12.500	5.437	4.450
E-LR-300-CG	3"	3	250 MCM	—	1	7	12.500	5.657	4.450
E-LR-350-CG	3-½"	3	350 MCM	—	1	10	15.500	6.922	5.500
E-LR-400-CG	4"	4	350 MCM	—	1	10	15.500	6.922	5.500

Conduit Bodies with Cover & Gasket

Combination (EMT/IMC/RIGID)

T Type



E528771

Features

- Set screw and threaded T type with cover and gasket
- Suitable for use in concrete
- NPT Tapered hubs
- NEMA FB1 rated for wet locations use with threaded rigid metal conduit only

Applications

- Provides access to conductors for pulling, splicing and maintenance

Standard Material

- Copper free aluminum die cast
- Steel screws


Standard Finish

- Powdercoat

Catalog Number	Size	Wire Size		Unit Carton	Ship Case	Weight Case lbs	Dimensions (in)		
		Max. Number	Max. Size				A	B	C
E-T-50-CG	1/2"	1	6 AWG	10	100	38	4.720	1.370	2.060
E-T-75-CG	3/4"	2	6 AWG	10	50	30	5.570	1.625	2.335
E-T-100-CG	1"	3	6 AWG	10	100	20	6.460	1.900	2.705
E-T-125-CG	1-1/4"	3	2 AWG	2	10	19	8.528	2.770	3.630
E-T-150-CG	1-1/2"	3	2 AWG	2	10	21	8.528	2.770	3.630
E-T-200-CG	2"	3	2/0 AWG	—	2	5	10.831	3.335	3.980
E-T-250-CG	2-1/2"	3	4/0 AWG	—	1	8	13.500	4.060	5.825
E-T-300-CG	3"	3	250 MCM	—	1	8	13.500	4.685	5.825
E-T-350-CG	3-1/2"	3	350 MCM	—	1	11	15.937	5.450	7.060
E-T-400-CG	4"	4	350 MCM	---	1	11	15.937	5.450	7.060

Combination (EMT/IMC/RIGID)

X Type



E528771
NEMA FB1

Features

- Set screw and threaded X type with cover and gasket
- Suitable for use in concrete
- NPT Tapered hubs
- NEMA FB1 rated for wet locations use with threaded rigid metal conduit only

Applications

- Provides access to conductors for pulling, splicing and maintenance

Standard Material

- Copper free aluminum die cast
- Steel screws


Standard Finish

- Powdercoat

Catalog Number	Size	Wire Size		Unit Carton	Ship Case	Weight Case lbs	Dimensions (in)		
		Max. Number	Max. Size				A	B	C
E-X-50-CG	1/2"	2	6 AWG	5	50	20	4.750	2.690	1.850
E-X-75-CG	3/4"	2	6 AWG	5	25	16	5.500	3.000	1.880
E-X-100-CG	1"	3	6 AWG	2	10	7	6.500	3.500	2.150
E-X-125-CG	1-1/4"	3	2 AWG	1	5	9	8.250	4.500	2.750
E-X-150-CG	1-1/2"	3	2 AWG	1	5	10	8.250	4.500	2.750
E-X-200-CG	2"	3	2/0 AWG	1	2	6	10.500	5.380	3.630
E-X-250-CG	2-1/2"	3	4/0 AWG	—	1	8	13.500	5.380	5.825
E-X-300-CG	3"	3	250 MCM	—	1	8	13.000	5.450	5.825
E-X-350-CG	3-1/2"	3	350 MCM	—	1	11	15.950	5.450	7.060
E-X-400-CG	4"	4	350 MCM	—	1	11	15.950	5.450	7.060

Conduit Body Covers

Zinc Plated Steel with Screws



E528771

Features

- Domed design allows for additional wiring space
- Includes screws

Applications

- Designed for use with Electroline® Conduit Bodies; interchangeable with all major brands

Standard Material

- Steel

Standard Finish

- Zinc plated

Catalog Number	Size	Unit Carton	Ship Case	Weight Case lbs	Dimensions (in)	
					A	B
E-L-50-SC	½"	25	250	15	3.875	1.310
E-L-75-SC	¾"	25	250	20	4.625	1.520
E-L-100-SC	1"	10	100	8	5.315	1.710
E-L-125-SC & E-L-150-SC	1-¼" - 1-½"	...	25	4	7.240	2.510
E-L-200-SC	2"	...	25	7	9.484	3.110
E-L-250-SC & E-L-300-SC	2-½" - 3"	...	10	7	12.187	4.440
E-L-400-SC	3-½" - 4"	...	5	9	14.937	5.500

Conduit Body Gaskets



Features

- Provides dust proof seal between conduit body and cover to protect from hazardous elements
- Fits all Form 5 LB, LL, LR, C and T type conduit bodies and covers

Applications

- For use with Electroline® Conduit Bodies ½" - 4"

Standard Material

- Neoprene

Catalog Number	Size	Unit Carton	Ship Case	Weight Case lbs	Dimensions (in)	
					A	B
E-L-50-NG	½"	50	500	1	3.935	1.36
E-L-75-NG	¾"	50	500	1	4.600	1.55
E-L-100-CG	1"	25	500	2	5.370	1.76
E-L-125-CG & E-L-150-CG	1-¼" - 1-½"	25	500	2	7.250	2.50
E-L-200-CG	2"	25	250	2	9.500	3.07
E-L-250-CG & E-L-300-CG	2-½" - 3"	10	100	2	12.125	4.36
E-L-350-CG & E-L-400-CG	3-½" - 4"	5	50	2	14.812	5.40